


Standard arm closers

TS6204



Description

Medium duty, multi-purpose overhead door closer for most applications.

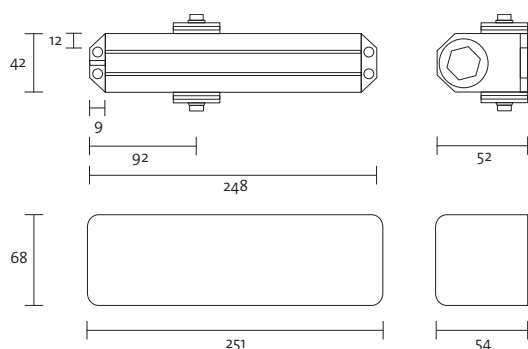

All dimensions are in mm.

Product specification

Power size (adjustable by spring)

EN2 (up to 850mm / 45kg)	Yes
EN3 (up to 950mm / 60kg)	Yes
EN4 (up to 1100mm / 80kg)	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Adjustable delayed action	Optional
Adjustable back check	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	80
Opening angle	180°
LH and RH doors - universal application	Yes
Fire rated (BS EN 1634-1: 2000)	Yes

Optional = not covered by CE marking

BS EN 1154 classification

TS6204 series closers have been independently tested to conform with the EN 1154 performance standard.

They are CE marked and are classified as follows:

Regular Arm Fig 1

4	8	4 3	1	1	3
---	---	--------	---	---	---

BS EN 1634 fire test

TS6204 closers have been tested to EN 1634 for 30, 60 and 120 minute doorsets.

Test certificates are available on request.

Guarantees

10 year guarantee.

TS6000 series options

Drop plate	Optional
Available finishes	Silver and plated



1121



Certificate No. WQM 132